

# TURNOUT TUFF™

Available only through Seats 911.



## Ask for it by name!

### POLYURETHANE-COATED NYLON

- 1,000 x 1,000 Denier Nylon
- Suitable for Heavy Duty Application
- Water Repellent to 75 PSI of Water Pressure
- Manufactured to Meet Flammability Requirements Contained in the Following Specifications:
  - California Fire Code Technical Bulletin No. 117 Section E
  - UFAC Class 1
  - FMVSS 302

### MATERIAL SPECS

**Weight:** 11 oz. +/- 1.5 oz. per linear yard


**Thickness:** 0.156 inches

**Bursting Strength:** 300+ pounds per foot

**Surface Abrasion:** 1,000+ cycles—Heavy Grit Wheel

## SUPER TUFF

covering material for 911 Seats!

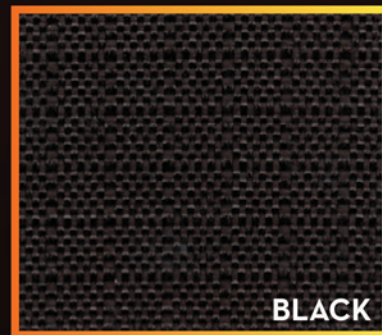

*To guard and  
protect firefighters.*

**seats** 

Member of the Nordic Group of Companies, Ltd.

1515 Industrial Street | Reedsburg, WI 53959

Phone 608.524.8261 | 800.443.0615 | Fax 800.294.6004

Email [info@seatsinc.com](mailto:info@seatsinc.com)

[www.seatsinc.com](http://www.seatsinc.com)